

Type:
Job:
Fixture Catalog number:

Fixture and Finish

Mounting Options:


Ordered Separately from Fixture
 See page 2

Approvals:

Date:
Page: 1 of 2

Specifications

Hood: Spun aluminum, supported on brass rods.
Stem: Cast aluminum with 1/2" NPT at bottom, plus solid brass locknut for mounting.
Socket: Porcelain medium base with silicone lamp gasket.
Wiring: 3' No. 18-2 12 volt cable with fork connectors.
Lamp: 25 watt A-19 included.
Finish: Super TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness, applied over a chromate conversion coating; 2500 hour salt spray test endurance rating. Standard colors are Black (**BL**), Dark Bronze (**DB**), and Verde Green.
Certification: UL Listed to U.S. safety standards for wet locations. Fixture manufacturer shall employ a quality program that is certified to meet the ISO 9001:2000 standard.



ORDERING INFORMATION

Fixture*	Finish
<input type="checkbox"/> KLV115BL	Black
<input type="checkbox"/> KLV115DB	Dark Bronze
<input type="checkbox"/> KLV115GR	Verde Green

Wattage / Lamp

25W - 50W
 A-19 (12 Volt)
 Incandescent
 (25W Lamp Included)

*Remote transformer required.



Type:


Job:

Page: 2 of 2



Mounting Options

Ordered Separately from Fixture
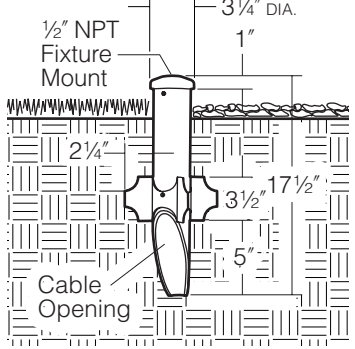
<p>PowerPost™ by Engineered Products Co. Cat. No. <input type="checkbox"/> EP17 <input type="checkbox"/> No Option</p>	<p>PVC fixture molded in black with 1/2" NPT mount is corrosion free and UV resistant. Replaces EMT, conduit connectors and weatherproof boxes. 100% shatter resistant against denting and cracking. Angled bottom to eliminate cable congestion. 17 1/2" post length</p>	
<p>Low Voltage Spear Mount Cat. No. Finish <input type="checkbox"/> KLV400BL Black <input type="checkbox"/> KLV400DB Dark Bronze <input type="checkbox"/> KLV400GR Verde Green <input type="checkbox"/> No Option</p>	<p>Die-cast low copper aluminum with 1/2" NPSM fixture mount. Stainless steel set screw locks fixture into mount. Cable slot allows easy fixture mounting before or after installation in ground. Super TGIC powder coat paint over clear anodizing and chromate conversion. Spear Mounting in Concrete In addition to soil mounting, the KLV400 can be installed in a concrete footing for added stability and permanence.</p>	